

Main products 主营产品



<<< FOLDING HOUSE
折叠房



EXPANDABLE FOLDING CONTAINER HOUSE >>>
双翼拓展房



<<< 20 FEET LUXURY APARTMENT
20尺豪华公寓



FLAT TOP EXPANDABLE FOLDING CONTAINER HOUSE >>>
平顶双翼拓展房



<<< SINGLE LAYER FOLDING BED
单层折叠床



<<< RESTROOM
单位卫生间



<<< TWO SEATS BATHROOM
双位卫生间

FOLDING BED WITH UPPER AND LOWER BUNKS >>>
上下铺折叠床



SHOWER >>>
淋浴间



PRODUCT PRESENTATION

产品介绍

The expandable house adopts an expandable structure, which increases the available space of the house after expansion, creating a larger living space; The appearance and spatial layout appear unique and can be freely customized according to customer requirements; Can be quickly assembled and disassembled, facilitating relocation to different locations; Whether it is for home living, business office, or emergency rescue, expandable housing can provide convenient living solutions.

可拓展房屋采用可拓展的结构，展开后房屋可用空间得到增加，创造更大的生活空间；外观和空间布局显得别出心裁，可根据客户要求自由定制；可以快速组装和拆卸，方便搬迁不同的场所；无论是家庭居住、商务办公还是紧急救援，可拓展房屋都能提供便捷的居住解决方案。



PRODUCT EXTERIOR

产品外观



PRODUCT LAYOUT

产品布局



20 FEET, 1 BEDROOM
20尺一室



40 FEET, 3 BEDROOMS
40尺三室



20 FEET, 1 BEDROOM
20尺两室



20 FEET, 3 BEDROOMS
20尺三室



40 FEET, 4 BEDROOMS
40尺四室

INTERNAL DECORATION OF THE PRODUCT

产品内饰



ONE BEDROOM, TWO LIVING ROOMS
一室两厅



TWO BEDROOMS, TWO LIVING ROOMS
两室两厅





TWO BEDROOMS, TWO LIVING ROOMS (MASTER BEDROOM)
两室两厅(主卧)



TWO BEDROOMS, TWO LIVING ROOMS (SIDE BEDROOM)
两室两厅(次卧)



KITCHEN LAYOUT
厨房布局



BATHROOM
卫生间






30FT 2BEDROOMS EXPANDABLE HOUSE WITH PAVILION

30尺2卧室带凉亭拓展房

LARGER BEDROOM
MORE COMFORTABLE
超大卧室更舒适

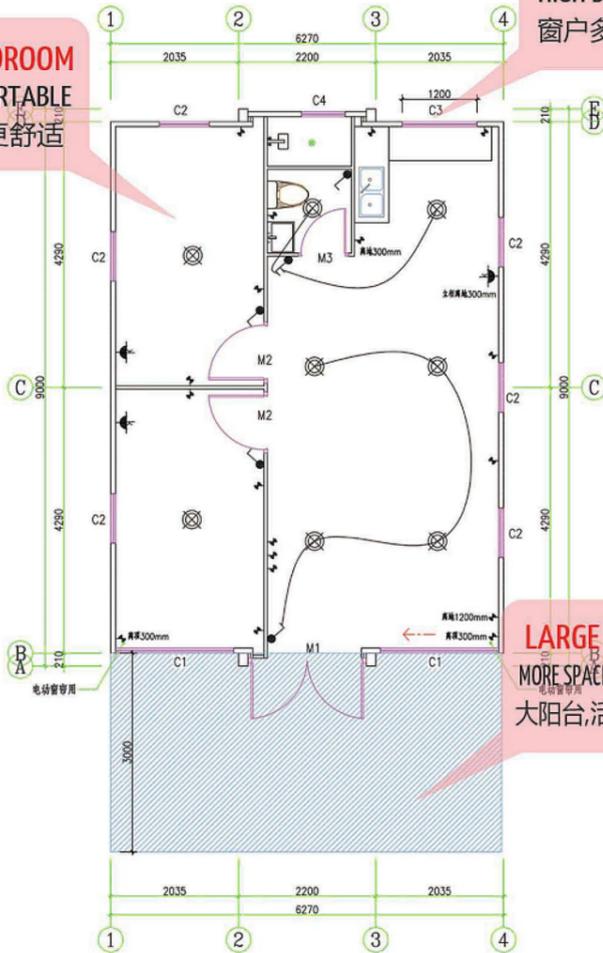

MORE WINDOWS
HIGH DAYLIGHT RATE
窗户多,日照更充足

<<< **LAYOUT**
布局

LARGE BALCONY
MORE SPACE FOR ACTIVITIES
大阳台,活动空间更大

BATHROOM ▼

浴室



HIGH-END SHOWER
WELL-KNOWN BRAND, TRUSTWORTHY
高端淋浴品牌,值得信赖

SLIDING PARTITION DOOR
REALIZE DRY AND WET SEPARATION
MULTIPLE PEOPLE CAN USE THE BATHROOM AT THE SAME TIME
SAFER AND CLEANER
滑动隔断门
实现干湿分离
多人可以同时使用浴室
更安全,更清洁

EXHAUST FAN
排气扇

SHELVES
置物架


MOISTURE-PROOF SOCKET
SAFER
防潮插座,更安全

IMITATION STONE WALL
WATERPROOF, MOISTURE-PROOF AND DURABLE.
仿石墙防水、防潮、耐用

FLOOR DRAIN
地漏

PITCHED ROOF ▼

斜屋顶



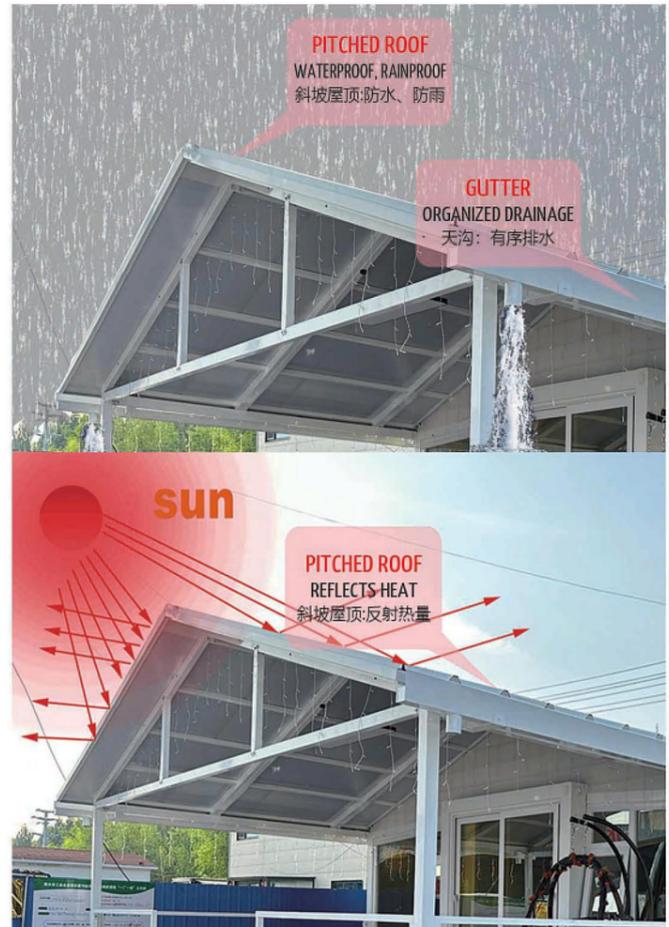


PITCHED ROOF
WATERPROOF, RAINPROOF
斜坡屋顶防水、防雨

GUTTER
ORGANIZED DRAINAGE
天沟:有序排水

sun

PITCHED ROOF
REFLECTS HEAT
斜坡屋顶:反射热量

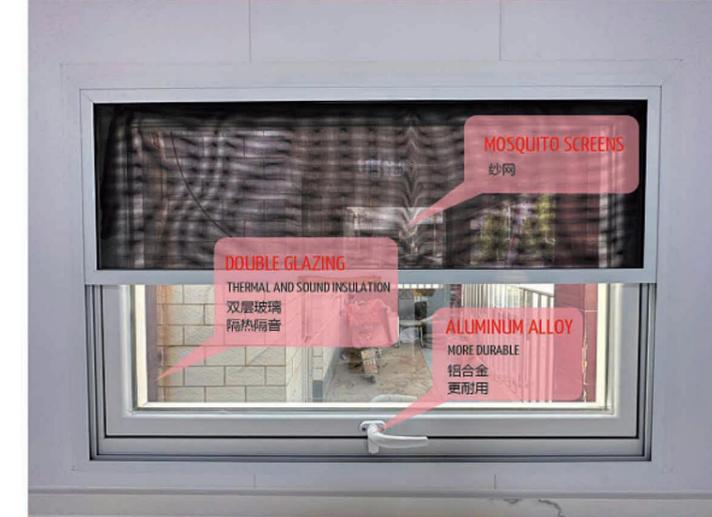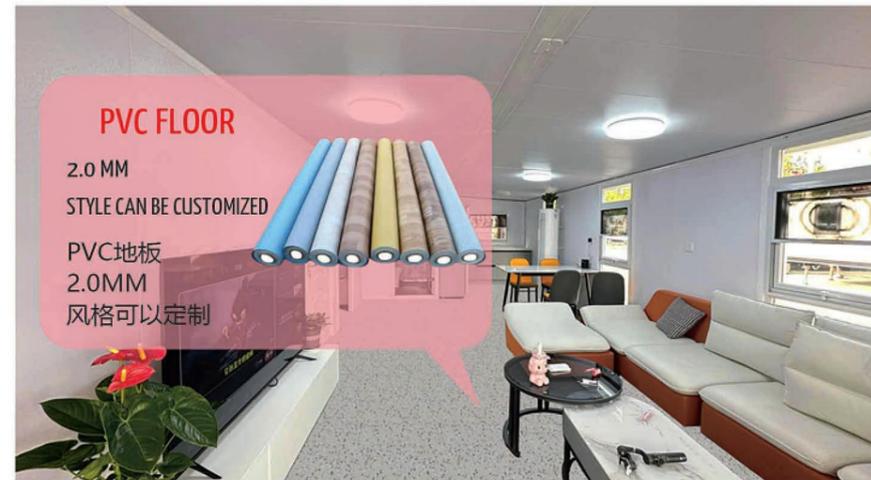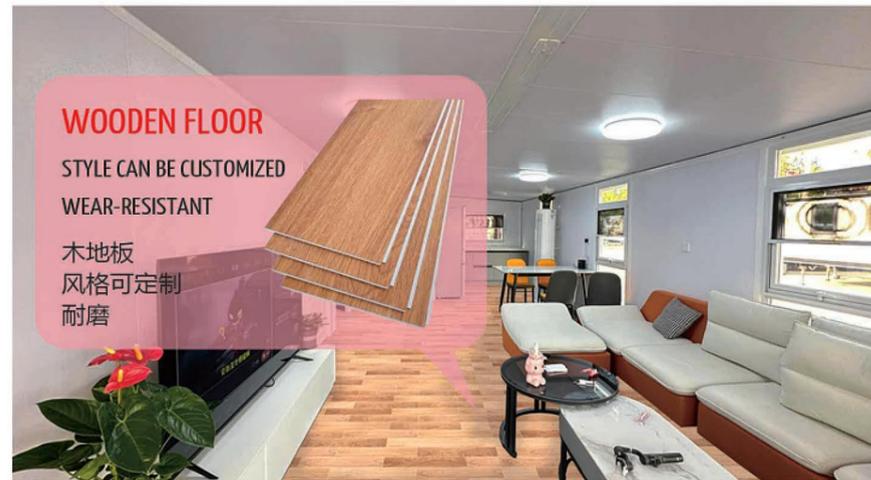

PRODUCT PARAMETERS

产品参数

20尺双翼拓展房技术参数

品牌		B-TEC	
基本信息	拓展尺寸 (mm) L*W*H	L5900*W6300*H2480	户型: 一室一厅 (可定制)
	内部空间 (mm) L*W*H	L5640*W6140*H2240	占地面积: 36㎡ 总净重量: 2500KG
	折叠尺寸 (mm) L*W*H	L5900*W2200*H2480	装柜数量: 40尺高柜装2套
框架结构	主梁	镀锌方管80*100*2.5mm Q235	
	立柱	镀锌折件150*210*2.0mm Q235	
	副框架	镀锌方管40*60*1.5mm Q235	
	箱体吊头	镀锌210*150*160*4mm Q235	
	合页	镀锌加厚合页 Q235	
地板	中间地板	18mm水泥地板+2.0mm地板革	
	两边地板	18mm竹胶板+2.0mm地板革	
保温墙体	侧墙	0.35mm彩钢板基板双面 (保温材质有岩棉、EPS和聚氨酯可选, 标配夹芯材料是EPS, 容重12kg/m³)。	
	隔断	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材质同上。	
	主顶和侧顶	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材质同上。	
电器系统	参数	1. 标配国标电线: 进线6mm², 空调插座4mm², 普通插座2.5mm², 照明1.5mm² (可根据国别定制符合认证要求的电路)。 2. 断路器系统: 2P63A总开1个, 2P43A/2P32A/1P20分路漏电保护器各一个。 3. 照明: 三防LED吸顶灯*6个。 4. 插座: 标配国际三孔插座 (可根据客户要求配置插座标准)。	
门窗系统	入户门	标配钢制防盗门 (可定制断桥铝门、钛镁合金门、铝合金门。)	
	窗户	标配塑钢双玻平开窗 (可定制断桥铝窗、铝合金窗。) 930*930mm*6个; 500*500mm*1个。	

Technical parameters for 20FT Expandable House

Brand		B-TEC	
Basic Information	Expanded Size(mm)L*W*H	L5900*W6300*H2480	House Type: one bedroom + one living room(can be customized)
	Internal Size(mm)L*W*H	L5640*W6140*H2240	Total Floor Area: 36m² Total Net Weight: 2500KG
	Folded Size(mm)L*W*H	L5900*W2200*H2480	Loading Quantity: 2 Sets/40HQ
Framework	Top Beam	Galvanized square tube 80*100*2.5mm Q235	
	Main Column	Galvanized folding part 150*210*2.0mm Q235	
	Subframe	Galvanized square tube 40*60*1.5mm Q235	
	Corner Fitting	Galvanized steel 210*150*160*4mm Q235	
	Hinge	Galvanized thickened hinges Q235	
Floor	Floor of the Middle Room	18mm cement floor + 2mm PVC leather floor	
	Floor of Side Room	18mm bamboo plywood floor + 2mm PVC leather floor	
	Side Wall	75mm sandwich panel, 0.35mm double-sided colored steel panel, (optional thermal insulation materials: rock wall, EPS and PU). The common sandwich material is EPS, unit weight: 12kg/m³.	
Thermal Insulation Material	Partition Wall	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
	Roof	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
	Electrical System	Parameter	1. Can be customized, our standard wire is GB wire: incoming wire 6mm², air-conditioner socket 4mm², socket 2.5mm², light 1.5mm². 2. Circuit breaker system: main switch 2P63A*1pc, leakage protector 2P43A/2P32A/1P20 1pc each. 3. Light: LED tri-proof ceiling light*6pcs. 4. Socket: general three-hole socket, can be customized.
Door and Window System	Entry Door	Steel security door (optional materials: broken bridge aluminum, titanium magnesium alloy, and aluminum alloy).	
Door and Window System	Window	PVC double glass casement window(optional materials: broken bridge aluminum and aluminum alloy). Common size: 930*930mm*6pcs, and 500*500mm*1pc.	

30尺双翼拓展房技术参数

品牌		B-TEC	
基本信息	拓展尺寸 (mm) L*W*H	L9000*W6300*H2480	户型: 一室一厅 (可定制)
	内部空间 (mm) L*W*H	L8740*W6140*H2200	占地面积: 54㎡ 总净重量: 3500KG
	折叠尺寸 (mm) L*W*H	L9000*W2200*H2480	装柜数量: 40尺高柜装1套
框架结构	主梁	镀锌方管80*140*2.5mm Q235	
	立柱	镀锌折件150*210*2.0mm Q235	
	副框架	镀锌方管40*60*1.5mm Q235	
	箱体吊头	镀锌210*150*160*4mm Q235	
	合页	镀锌加厚合页 Q235	
地板	中间地板	18mm水泥地板+2.0mm地板革	
	两边地板	18mm竹胶板+2.0mm地板革	
保温墙体	侧墙	75mm三明治夹芯板, 0.35mm彩钢板基板双面 (保温材质有岩棉、EPS和聚氨酯可选, 标配夹芯材料是EPS, 容重12kg/m³)。	
	隔断	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材质同上。	
	主顶和侧顶	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材质同上。	
电器系统	参数	1. 标配国标电线: 进线6mm², 空调插座4mm², 普通插座2.5mm², 照明1.5mm² (可根据国别定制符合认证要求的电路)。 2. 断路器系统: 2P63A总开1个, 2P43A/2P32A/1P20分路漏电保护器各一个。 3. 照明: 三防LED吸顶灯*6个。 4. 插座: 标配国际三孔插座 (可根据客户要求配置插座标准)。	
门窗系统	入户门	标配钢制防盗门 (可定制断桥铝门、钛镁合金门、铝合金门。)	
	窗户	标配塑钢双玻平开窗 (可定制断桥铝窗、铝合金窗。)	

Technical Parameters for 30FT Expandable House

Brand		B-TEC	
Basic Information	Expanded size(mm)L*W*H	L9000*W6300*H2480	House Type: one bedroom + one living room(can be customized)
	Internal size(mm)L*W*H	L8740*W6140*H2200	Total Floor Area: 54 m² Total Total Net Weight: 3500KG
	Folded Size(mm)L*W*H	L9000*W2200*H2480	Loading Quantity: 1 set/40HQ
Framework	Top Beam	Galvanized square tube 80*140*2.5mm Q235	
	Main Column	Galvanized folding part 150*210*2.0mm Q235	
	Subframe	Galvanized square tube 40*60*1.5mm Q235	
	Corner Fitting	galvanized 210*150*160*4mm Q235	
	Hinge	Galvanized thickened hinges Q235	
Floor	Floor of the Middle Room	18mm cement floor + 2mm PVC leather floor	
	Floor of Side Room	18mm bamboo plywood floor + 2mm PVC leather floor	
Thermal Insulation Material	Side Wall	75mm sandwich panel, 0.35mm double-sided colored steel panel, (optional thermal insulation materials: rock wall, EPS and PU). The common sandwich material is EPS, unit weight: 12kg/m³.	
	Partition Wall	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
	Roof	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
Electrical System	Parameter	1. Can be customized, our standard wire is GB wire: incoming wire 6mm², air-conditioner socket 4mm², socket 2.5mm², light 1.5mm². 2. Circuit breaker system: main switch 2P63A*1pc, leakage protector 2P43A/2P32A/1P20 1pc each. 3. Light: LED tri-proof ceiling light*6pcs. 4. Socket: general three-hole socket, can be customized.	
Door and Window System	Entry Door	Steel security door (optional materials: broken bridge aluminum, titanium magnesium alloy, and aluminum alloy).	
	Window	PVC double glass casement window(optional materials: broken bridge aluminum and aluminum alloy). Common size: 930*930mm*6pcs, and 500*500mm*1pc.	

40尺双翼拓展房技术参数

品牌			
拓展尺寸 (mm) L*W*H	L11800*W6300*H2480	户型:	一室一厅 (可定制)
基本信息	内部空间 (mm) L*W*H	L11540*W6140*H2200	占地面积: 72m ² 总净重量: 5000KG
	折叠尺寸 (mm) L*W*H	L11800*W2200*H2480	装柜数量: 40尺高柜装1套
框架结构	主梁	镀锌矩管80*140*3.5mm Q235	
	立柱	镀锌折件150*210*3.0mm Q235	
	副框架	镀锌矩管40*60*1.5mm Q235	
	箱体吊头	镀锌210*150*160*4mm Q235	
	合页	镀锌加厚合页 Q235	
地板	中间地板	18mm水泥地板+2.0mm地板革	
	两边地板	18mm竹胶板+2.0mm地板革	
保温墙体	侧墙	75mm三明治夹芯板, 0.35mm彩钢板基板双面 (保温材料有岩棉、EPS和聚氨酯可选, 标配夹芯材料是EPS, 容重12kg/m ³)。	
	隔断	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材料同上。	
	主顶和侧顶	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材料同上。	
电器系统	参数	1、标配国标电线: 进线6mm ² , 空调插座4mm ² , 普通插座2.5mm ² , 照明1.5mm ² (可根据国别定制符合认证要求的电路)。 2、断路器系统: 2P63A总开1个, 2P43A/2P32A/1P20分路漏电保护器各一个。 3、照明: 三防LED吸顶灯*6个。 4、插座: 标配国际三孔插座 (可根据客户要求配置插座标准)。	
门窗系统	入户门	标配钢制防盗门(可定制断桥铝门、钛镁合金门、铝合金门)	
	窗户	标配塑钢双玻平开窗(可定制断桥铝窗、铝合金窗)	

Technical parameters for 40FT expandable house

Brand			
Expanded Size(mm)L*W*H	L11800*W6300*H2480	House Type:	one bedroom + one living room (can be customized)
Basic Information	Internal Size(mm)L*W*H	L11540*W6140*H2200	Total Floor Area: 72m ² Total Net Weight: 5000KG
	Folded Size(mm)L*W*H	L11800*W2200*H2480	Loading Quantity: 1 set/40HQ
Framework	Top Beam	Galvanized square tube 80*140*3.5mm Q235	
	Main Column	Galvanized folding part 150*210*3.0mm Q235	
	subframe	Galvanized square tube 40*60*1.5mm Q235	
	Corner Fitting	Galvanized 210*150*160*4mm Q235	
	Hinge	Galvanized thickened hinges Q235	
Floor	Floor of the Middle Room	18mm cement floor + 2mm PVC leather floor	
	Floor of Side Room	18mm bamboo plywood floor + 2mm PVC leather floor	
Thermal Insulation Material	Side Wall	75mm sandwich panel, 0.35mm double-sided colored steel panel. (optional thermal insulation materials: rock wall, EPS and PU). The common sandwich material is EPS, unit weight: 12kg/m ³ .	
	Partition Wall	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
	Roof	50mm sandwich panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
Electrical System	Parameter	1. Can be customized, our standard wire is 6B wire: incoming wire 6mm ² , air-conditioner socket 4mm ² , socket 2.5mm ² , light 1.5mm ² . 2. Circuit breaker system: main switch 2P63A*1pc, leakage protector 2P43A/2P32A/1P20 1pc each. 3. Light: LED tri-proof ceiling light*6pcs. 4. Socket: general three-hole socket, can be customized.	
Door and Window System	Entry Door	Steel security door (optional materials: broken bridge aluminum, titanium magnesium alloy, and aluminum alloy).	
	Window	PVC double glass casement window (optional materials: broken bridge aluminum and aluminum alloy). Common size: 930*930mm*6pcs, and 500*500mm*1pc.	

700拓展房参数


品牌		
基本特征	外部尺寸 (mm) L*W*H	L5900*W4800*H2480
	内部尺寸 (mm) L*W*H	L5640*W4640*H2240
	折叠状态 (mm) L*W*H	L5900*W700*H2480
	总重量(kg)	2000
框架结构	中顶梁	80*100*2.5mm Q235B
	中底梁	80*100*2.5mm Q235B
	端侧梁	T2mm Q235B
	中立柱	150*210*2mm Q235B
	侧墙框架	P型管40*80*1.5mm Q235B
	次框架	40*60*1.5mm Q235B
	吊头	150*210*160*4mm Q235B
	折叠合页	13mm镀锌合页
	整体框架保护涂料	静电喷塑
	中柜顶底	80*100*2.5mm方管
边柜顶底	40*60*1.5mm方管	
箱顶	外部顶板	50mmEPS净化板
	内部吊顶	V200内吊顶
墙板	中间顶保温	50mmEPS净化板
	侧墙、前后墙板	75mmEPS板, 0.35mm彩钢板基板双面。
	内部隔板	50mmEPS净化板, 0.35mm彩钢板基板双面。
地板	中间地板	18mm水泥地板+2.0mm地板革
	两边地板	18mm竹胶板+2.0mm地板革
电气系统	所有电器都符合CE认证, 严格按照防潮规范安装, 并根据电路工程规范连接电路。室内: LED灯, 吸顶灯, 国际三孔插座空调插座, 63A漏电保护器。电压100V, 50HZ。	
普通防盗门	普通防盗门 1970*970mm*1个	
窗户	塑钢双玻平开窗*4个(920*920mm)	

Technical Parameters for 700 Expandable House

Brand		
Basic Information	External Size(mm)L*W*H	L5900*W4800*H2480
	Internal Size(mm)L*W*H	L5640*W4640*H2240
	Folding Size(mm)L*W*H	L5900*W700*H2480
	Total Net Weight(kg)	2000
Framework	Top Beam of the Middle Room	80*100*2.5mm Q235B
	Bottom Beam of the Middle room	80*100*2.5mm Q235B
	End Side Beam	T2mm Q235B
	Main Column	150*210*2mm Q235B
	Sidewall Framework	Special P tube 40*80*1.5mm Q235B
	Subframe	40*60*1.5mm Q235B
	Corner Fitting	150*210*160*4mm Q235B
	Hinge	13mm galvanized hinge
	Protective Coatings for the Whole Framework	Powder coating
	Ceiling Frame of the Middle Room	80*100*2.5mm square tube
Roof	Ceiling Frame of the Side Room	40*60*1.5mm square tube
	External Roof	50mm EPS Purification plate
Wall	Interior Roof	V200 Inner ceiling
	Thermal Insulation Wall of the Middle Room	50mm EPS purification plate
Wall	Side Wall	75mm EPS plate, 0.35mm double-sided colored steel panel
	Partition Wall	50mm EPS purification plate, 0.35mm double-sided colored steel panel
Floor	Floor of the Middle Room	18mm cement floor + 2mm PVC leather floor
	Floor of Side Room	18mm bamboo plywood + 2mm PVC leather floor
Electrical System	1. All electrical products are CE certified, strictly installed in accordance with moisture-proof specifications, and connected to electrical appliances according to circuit engineering specifications. 2. Indoor electric system: LED light, ceiling light, general three-hole socket, general three-hole socket, 63A leakage protector. Voltage: 110V, 50HZ.	
Door	steel security door 1970*970mm*1pc	
Window	PVC double glass casement window*4pcs(920*920mm)	

INSTALLATION STEPS >>>

安装步骤

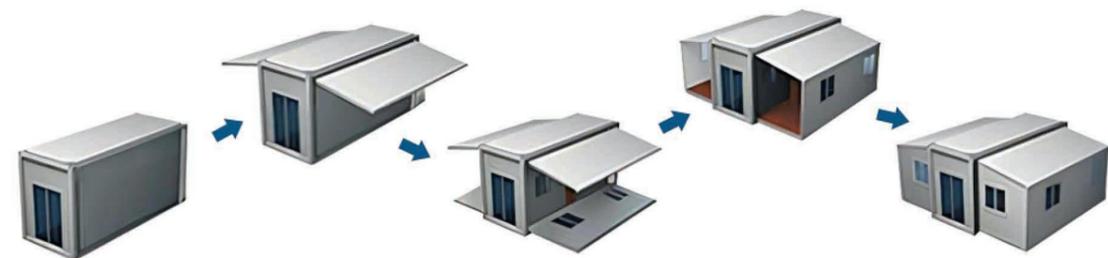

Easy installation: 4 workers + 10 mins = 1 house

简易安装: 4名工人 + 10分钟 = 1栋房子


LOADING PHOTOS >>>

装车照片




PRODUCT SKELETON DIAGRAM >>>

产品骨架图

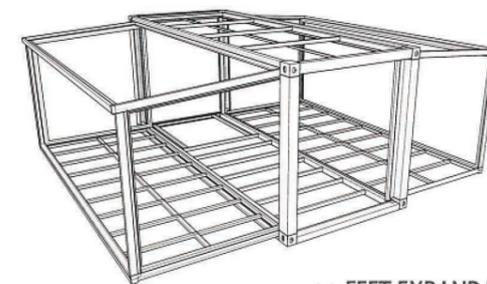


20 FEET EXPANDABLE FOLDING CONTAINER HOUSE

20尺双翼拓展房

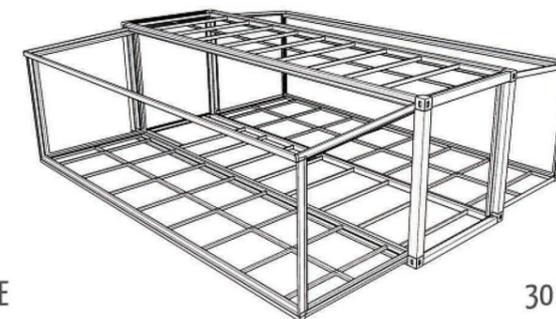


30 FEET EXPANDABLE FOLDING CONTAINER HOUSE

30尺双翼拓展房

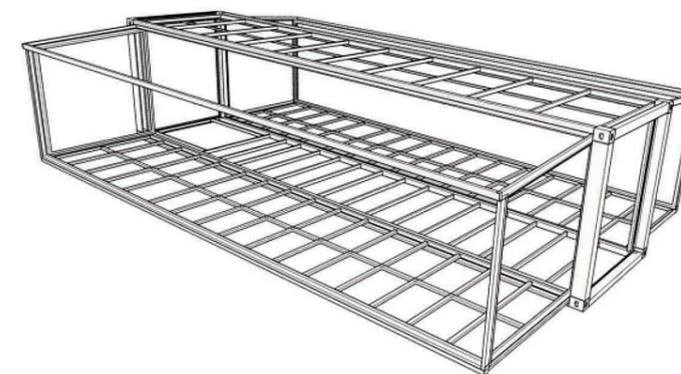

40 FEET EXPANDABLE FOLDING CONTAINER HOUSE

40尺双翼拓展房

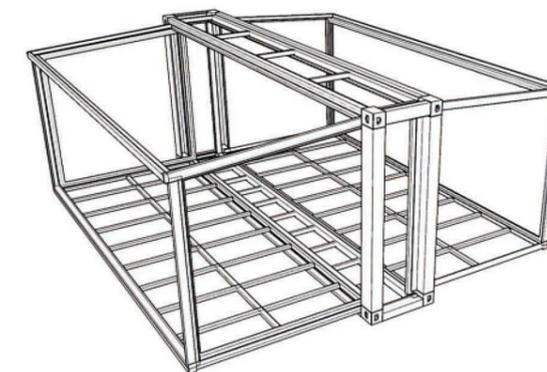

700 WIDE EXPANDABLE FOLDING CONTAINER HOUSE

700宽双翼拓展房

PRODUCT PRESENTATION

产品介绍

The space and layout of 20FT luxury apartment are unique, the inner space is more spacious, it can be direct check-in and easily moved to different places.

20尺豪华公寓空间和外观布局显得别出心裁，室内空间显得更加宽敞，落地直接可拎包入住，方便搬迁不同场所。

Application: outdoor adventure, camping, scenic homestay and other facilities.

适用场所：户外探险，露营，景区民宿等设施场地。



PRODUCT PARAMETERS

产品参数

20尺豪华公寓技术参数

品牌		STEC	
基本信息	外部尺寸(mm)L*W*H	L5900*W2200*H2480	户型：一厅
	内部空间(mm)L*W*H	L5720*W2050*H2200	占地面积：13㎡
	重量(KG)	1800	装柜数量：40尺高柜装2套
框架结构	主梁	镀锌方管80*140*1.5mm Q235	
	立柱	镀锌折件150*150*2.0mm Q235	
	檩条	镀锌方管40*80*1.2mm Q235	
	箱体吊头	镀锌150*150*3mm Q235	
地板	地面	18mm水泥地板+2.0mm地板革	
	侧墙	50mm EPS夹芯板, 0.35mm彩钢板基板双面, 容重12kg/m³ EPS+金属雕花板	
保温墙体	隔断	50mm三明治夹芯板, 0.35mm彩钢板基板双面, 保温材料同上。	
	顶部	75mm玻璃丝棉卷, 容重16kg/m³。	
电器系统	参数	1. 标配国标电线：进线6mm², 空调插座4mm², 普通插座2.5mm², 照明1.5mm² (可根据国别定制符合认证要求的电路)。 2. 断路器系统：2P63A总开1个, 2P43A/2P32A/1P20分路漏电保护器各一个。 3. 照明：三防LED吸顶灯*9个。 4. 插座：标配国际三孔插座 (可根据客户要求配置插座标准)。	
门窗系统	入户门	标配钢质门 (可定制断桥铝门、钛镁合金门)	
	窗户	标配塑钢双玻平开窗 (可定制断桥铝窗、铝合金窗)	
卫生间	淋浴房	高端大理石淋浴底、高端花洒、钛镁合金推拉门	
	洗手间	钛镁合金门+陶瓷一体柜盆+储物镜+陶瓷马桶	


Technical Parameters for 20 Feet Luxury Apartment

Brand		STEC	
Basic Information	External Size (mm) L*W*H	L5900*W2200*H2480	House Type: One Living Room
	Interior Size (mm) L*W*H	L5720*W2050*H2200	Total Floor Area: 13㎡
	Total Net Weight: (kg)	1800	Loading Quantity: 2sets/40HQ
Framework	Top Beam	Galvanized square tube 80*140*2mm Q235	
	Column	Galvanized folding part 50*150*2.0mm Q235	
	Purlin	Galvanized square tube 40*80*1.2mm Q235	
	Corner Fitting	Galvanized steel 150*150*3mm Q235	
Floor	Floor	18mm Cement Floor + 2.0mm PVC Floor	
	Sidewall	50mm EPS panel, 0.35mm double-sided colored steel panel, EPS unit weight: 12kg/m³. +metal carved panel	
Thermal Insulation Wall	Partition Wall	50mm EPS panel, 0.35mm double-sided colored steel panel, same thermal insulation material as above.	
	Roof	75mm glass wool, unit weight: 16KG/m³.	
Electrical System	Parameter	1. Can be customized, our standard wire is GB wire: incoming wire 6mm², air-conditioner socket 4mm², socket 2.5mm², light 1.5mm². 2. Circuit breaker system: main switch 2P63A*1pc, leakage protector 2P43A/2P32A/1P20 1pc each. 3. Light: LED tri-proof ceiling light*9pcs. 4. Socket: general three-hole socket, can be customized.	
Door and Window System	Entry Door	Standard steel door (optional materials: broken bridge aluminum, titanium magnesium alloy)	
	Window	PVC double glass window (optional materials: broken bridge aluminum and aluminum alloy).	
Restroom	Shower Room	High-grade marble floor in shower room and shower head, titanium magnesium alloy sliding door	
	Toilet Room	Titanium magnesium alloy door + ceramic integrated cabinet basin + mirror cabinet + ceramic toilet	



TINY HOUSE ON WHEELS 车轮房

LAYOUT 布局

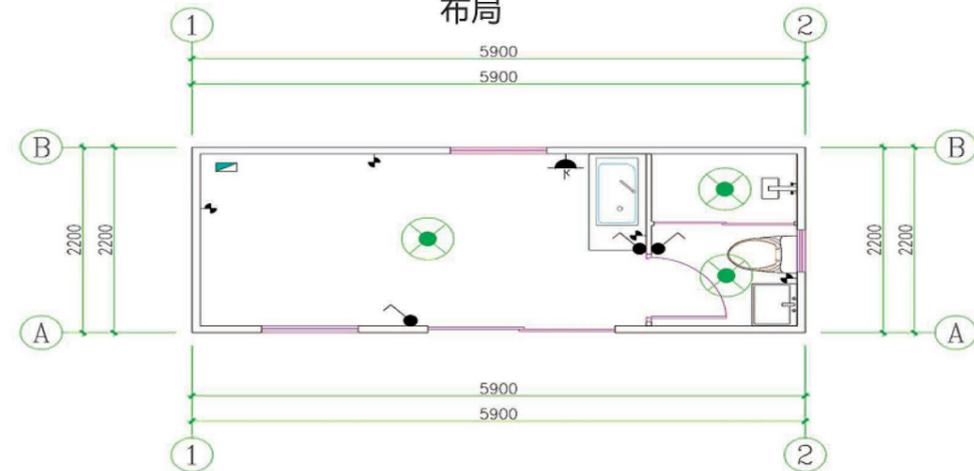

WINDOW
SLIDING, ALUMINUM ALLOY, DOUBLE GLAZING
窗户
滑动, 铝合金, 双层玻璃

BEDROOM
卧室



DOOR
SLIDING, ALUMINUM ALLOY, DOUBLE GLAZING
门
滑动, 铝合金, 双层玻璃

TOILET & BATHROOM
厕所和浴室

KITCHEN
厨房

LIVING ROOM
客厅

FLOOR PVC
PVC地板



WALL CABINETS
REASONABLE USE OF SPACE
壁柜
合理利用空间

FLOOR CABINET
SIMPLE AND PRACTICAL
落地式橱柜
简单实用



VEGETABLE SINK
HIGH QUALITY 304 STAINLESS STEEL MATERIAL
蔬菜水槽
优质304不锈钢材料



PARTATION DOOR
分隔门

MIRROR
镜子

WASHBASIN
洗脸盆

CABINET
内橱

TOILET
卫生间



SHOWER
淋浴



PRODUCT PARAMETERS

产品参数

20尺平顶双翼技术参数

品牌	S-TEC		
产品型号	20英尺平屋顶可拓展房屋	户型	两室一厅一厨一卫
拓展尺寸	L5900*W6420*H2560mm	占地面积	38m ²
内部尺寸	L5740*W6260*H2400mm	入住人数	2-5人
折叠尺寸	L5900*W2200*H2560mm	总净重量	4吨
用电功率	12KW	装柜数量	2套/40尺高柜
框架结构			
序号	名称	内容	规格
1	主框架(镀锌)	顶侧梁	80*100*3.0mm方管+2.0mm钣金
2		顶端梁	80*100*3.0mm方管+2.0mm钣金
3		底侧梁	80*100*3.0mm方管+2.0mm钣金
4		底端梁	80*100*3.0mm方管+2.0mm钣金
5		吊头	D型环焊接吊环
6		钢立柱	80*100*3.0mm方管+2.0mm钣金
7	侧翼框架(镀锌)	顶框架	80*100*2.5mm镀锌方管+2.0mm钣金
8			40*60*1.5mm镀锌方管
9		底框架	80*100*3.0mm方管+2.0mm钣金
10		折叠合页	130mm镀锌合页
11	整体框架保护涂料	喷涂	塑粉烤漆
12	箱顶	主体外部顶板	75mm EPS夹心板 镀锌彩板0.35
13		侧翼外部顶板	75mm EPS夹心板 镀锌彩板0.35
14	墙板	侧墙、前后	75mm EPS夹心板 镀锌彩板0.35
15		内隔断板	75mm EPS夹心板 镀锌彩板0.35
16	地面	主框	防火水泥地板18mm
17		两翼	竹胶板18mm
18		外饰面	2.0mm 塑胶地板
19	门窗		断桥铝窗
20			断桥铝双开门
21	厨房	L型橱柜、洗菜盆、上下水管道	
22	干湿分离卫生间	钛镁合金门、洗手盆、镜柜、马桶、花洒、玻璃推拉门、地漏、上下水管道	
23	电气系统(国标)	断路器系统	32A漏电保护器1个, 电压220V, 50HZ.
24		灯	吸顶灯
25		插座	标配国标三孔、五孔插座(可根据客户要求配置插座标准)
26		灯开关	双开、单键开关(可根据客户要求配置开关标准)
27		配线	进线6mm ² , 空调插座4mm ² , 普通插座2.5mm ² , 照明1.5mm ²

Technical Parameters of 20FT Flat-Roof Expandable Container House

Brand	S-TEC		
Model	20FT Flat-Roof Expandable Container House	Layout	2 bedrooms, 1 living room, 1 kitchen and 1 bathroom
Extended Size	L5900*W6420*H2560mm	Total Floor Area	38m ²
Internal Size	L5740*W6260*H2400mm	Number of Occupants	2-5 persons
Folded Size	L5900*W2200*H2560mm	Total Net Weight	4000KG
Power	12KW	Loading Quantity	2 sets/40HQ
Frame structure			
Serial No.	Name	Content	Specifications
1	Main Frame (galvanized)	Top Side-Beam	80*100*3.0mm square tube+2.0mm metal plate
2		Top End-Beam	80*100*3.0mm square tube+2.0mm metal plate
3		Bottom Side-Beam	80*100*3.0mm square tube+2.0mm metal plate
4		Bottom End-Beam	80*100*3.0mm square tube+2.0mm metal plate
5		Corner fitting	Type D welded Ring
6	Side Frame (galvanized)	Steel Column	80*100*3.0mm square tube+2.0mm metal plate
7		Top Frame	80*100*2.5mm square tube + 2.0mm metal plate
8		Bottom Frame	80*100*3.0mm square tube+2.0mm metal plate
9		Folding Hinge	130mm galvanized hinges
10		Protective Coating for Frame	Spray
11			Plastic powder spraying
12	Roof	Roof of the Middle Room	75mm EPS sandwich panel
13		Roof of side Room	75mm EPS sandwich panel
14	Wall	Exterior Wall	75mm EPS sandwich panel
15		Partition Wall	75mm EPS sandwich panel
16	Floor	Floor of the Middle Room	18mm MGO floor
17		Floor of side Room	18mm bamboo plywood
18		Decorative floor	2.0mm PVC floor
19	Door and Window		Broken bridge aluminum window
20			Broken bridge aluminum double doors
21	Kitchen	L-shaped cabinet, washing basin, inlet and outlet pipes	
22	Toilet	Wet/dry separation titanium magnesium alloy door, wash basin, mirror cabinet, toilet, shower, glass sliding door, floor drain, inlet and outlet pipes	
23	Electrical System (GB)	Circuit breaker system	32A leakage protector 1pc, voltage 220 V, 50 HZ.
24		Light	Ceiling light
25		Socket	General three-hole, five-hole socket (can be customized)
26		Light switch	Double switch, single switch (can be customized)
27		Wiring	inlet wire 6mm ² , air-conditioning socket 4mm ² , general socket 2.5mm ² , lighting 1.5mm ² .

PRODUCT PRESENTATION

产品介绍

The expandable house adopts an expandable structure, which increases the available space of the house after expansion, creating a larger living space; The appearance and spatial layout appear unique and can be freely customized according to customer requirements; Can be quickly assembled and disassembled, facilitating relocation to different locations; Whether it is for home living, business office, or emergency rescue, expandable housing can provide convenient living solutions.

可拓展房屋采用可拓展的结构, 展开后房屋可用空间得到增加, 创造更大的生活空间; 外观和空间布局显得别出心裁, 可根据客户要求自由定制; 可以快速组装和拆卸, 方便搬迁不同的场所; 无论是家庭居住、商务办公还是紧急救援, 可拓展房屋都能提供便捷的居住解决方案。





INTEGRATED SOLAR CONTROLLER AND INVERTER MACHINE
太阳能控制器与逆变器一体机



ENERGY STORAGE BOX
储能箱



DISTRIBUTION BOX
配电箱



WIND POWER GENERATION CONTROLLER
风力发电控制器

Configuration facilities: wind dirven (300W vertical axis), solar photovoltaic panels (330W*18 pieces, total drought capacity of 5094W), Energy storage meal (5000W phosphorus broken lithium iron battery rechargeable), 5000W solar energy controller and inverter integrated machine.

配置设施: 风力发电机(300W垂直轴), 太阳能光伏板(330W*18块, 总容量5094W), 储能箱 (5000W磷酸铁锂蓄电池可充电), 5000W太阳能控制器与逆变器一体机。

Application: remote pastoral areas, areas without power supply, islands, scenic spots, etc.

适应场景: 边远牧区、无电源地区、海岛、景区民宿等。

PRODUCT PRESENTATION

产品介绍

It can be used for medical disaster relief, military barracks, post earthquake resettlement, highways, railways, buildings, wind power, optoelectronics, oil exploration, emergency response of dangerous buildings, etc. Quick and convenient disassembly and assembly, no need for professional construction teams, no construction waste, shortened disassembly and assembly time, secondary utilization without damage, saving transportation and disassembly costs, beautiful, durable, low-carbon, green, and environmentally friendly.

可用于医疗救灾、部队营房、地震灾后安置、公路、铁路、楼宇、风电、光电、石油勘探、危房应急等。拆装快速便捷、无需间, 二次利用无破损、节省运输和拆装费用、美观、耐用、低碳、绿色、环保。



PRODUCT EXTERIOR

产品外观



INTERNAL DECORATION OF THE PRODUCT

产品内饰



PRODUCT PARAMETERS

产品参数

1400H 出口折叠箱产品参数表

品牌	STEC				
基本尺寸	展开尺寸: 长5900mm*宽2500mm*高2540mm	折叠尺寸: 长5900mm*宽2500mm*高340 (-5~7) mm			
	内部尺寸: 长5730mm*宽2380mm*高2410mm				
框架结构	名称	规格	厚度/mm	属性/材质	数量
	底框次檩条	镀锌方管40*40*5.9M	1.3	Q235	1支
	底部檩条	镀锌方管40*40*2.36	1.3	Q235	9支
	底部纵梁	镀锌方管60*140*5.9M	1.5	Q235	2支
	侧扇主梁2	异形P管40*55*5.9m	1.3	Q235	4支
	地板	2810*1180	15	玻镁防火地板	4块
	侧扇主梁1	镀锌子母扣槽*5.9M	1.5	Q235	4支
	侧扇立柱	镀锌方管30*50*1.18	1.3	Q235	12支
	顶框主梁	异形P管60*80*5.9m	1.3	Q235	2根
	封顶板	镀锌彩涂卷*5.9m	0.35	Q235	2张
	顶部檩条	镀锌方管30*50*2.36m	1.3	Q235	5根
	内吊顶板	v200吊顶板*2350	0.25	镀锌彩涂板	30张
	顶框次檩	异形P管70*80*2.36m	1.5	Q235	2支
	前后墙护板	1160*105	2	Q235开平钢板	8块
	吊头板	165*105	4	Q235开平钢板	8块
	前后墙框架	镀锌方管40*80*2.45m	1.2	Q235	4根
门口框架	镀锌扣槽40*70*2.45m	1.2	Q235	1根	
门窗配置	门	宽970*高1970 钢制防盗门			1樘
	窗	主副框双玻推拉窗			2樘
电器/电路配置	主线	4mm²国标软铜线			5米
	照明线	1.5mm²国标软铜线			4米
	插座线	2.5mm²国标软铜线			18米
	地线	1.5mm²国标软铜线			8米
	灯	通用螺口/节能LED灯		21W	1个
	插座	欧标3孔		16A	2个
	插座	欧标6孔		16A	1个
	开关	断路器		10A	1个
	空气开关			32A	1个
	闸盒				1个
保温配置	前后墙	65mm岩棉净化板、彩板双面0.3mm、岩棉50KG或EPS净化板、彩板双面0.3mm可选或EPS净化板	0.3		7.5米
	6米面	50mm岩棉净化板、彩板双面0.3mm、岩棉50KG	0.3		23.5米
	屋顶	75mm玻璃丝绵卷、14KG			18平米
辅料	D型胶条	8mm*6mm			180米

Technical Parameters for 1400H Folding House

Brand	STEC			
Basic Information	Expanded Size (mm)	Folded Size (mm)		
	Internal Size (mm)	Internal Size (mm)		
Framework	Name	Specifications	Thickness/mm	Properties /Materials
	Bottom Frame Purlin	Galvanized square tube 40*40*5.9m	1.3	Q235
	Bottom Purlin	Galvanized square tube 40*40*2.36mm	1.3	Q235
	Bottom Stringer	Galvanized square tube 60*140*5.9m	1.5	Q235
	Side Main Beam	Special P tube 40*55*5.9m	1.3	Q235
	Floor	2810*1180mm	18	MGO
	Side Main Beam 1	Galvanized clasp groove*5.9m	1.5	Q235
	Side Column	Galvanized square tube 30*50*1.18mm	1.3	Q235
	Top Frame Girder	Special P tube 60*80*5.9m	1.3	Q235
	Ceiling plate	Galvanized colored plate	0.4	Q235
	Top Purlin	Galvanized square tube 30*50*2.36m	1.3	Q235
	Inner Ceiling Panel	Colored steel panel ceiling	0.25	Galvanized colored plate
	Top Frame Purlin	Special P tube 70*80*2.36m	1.5	Q235
	Guard Panels of Front and Rear Wall	1160*105mm	2	Q235 flat open plate
	Lifting Clutches Plate	165*105mm	4	Q235 flat open plate
	Frame of Front and Rear Walls	Galvanized square tube 40*80*2.34m*2pcs/2.33m*2pcs	1.2	Q235
Door Frame	Galvanized U groove 40*70*2.33m*1pc/0.97*1pc	1.2	Q235	
Window and Door System	Door	Width 970mm*Height 1970mm* 0.4mm		Steel security door
	Window	Double glass PVC sliding window		PVC
Electrical System	Main circuit	4mm² GB soft copper wire		
	Lighting Line	1.5mm² GB soft copper wire		
	Socket Wire	2.5mm² GB soft copper wire		
	Ground Wire	1.5mm² GB soft copper wire		
	Lamp	Strip lamp		
	Socket	International Triple Hole 10A*1.16 A 10A*2/T		
Thermal Insulation Material	Switch	10A		
	Air Switch	16A		
	Switch Box			
	Front and Rear Wall	65mm EPS color steel sandwich panel, unit weight 12 kg/m³, 0.3mm colored steel panel.		
Side Wall	50mm EPS color steel sandwich panel, unit weight 12 kg/m³, 0.3mm colored steel panel.			
Roof	75mm glass wool, 14kg/m³			
Other Accessories	Type D Strip	8mm*6mm		

1400L 出口折叠箱产品参数表

品牌	ETEC			
基本尺寸	展开尺寸 (mm) : 长5900*宽2480*高2540		折叠尺寸 (mm)	
	内部尺寸 (mm) : 长5720*宽2360*高2410		长5900*宽2480*高340(±5)	
框架结构	名称	规格	厚度/mm	属性/材质
	底框次檩条	镀锌方管40*40*5.9m	1.3	Q235
	底部檩条	镀锌方管40*40*2.36mm	1.3	Q235
	底部纵梁	镀锌方管60*140*5.9m	1.5	Q235
	侧扇主梁2	异形P管40*55*5.9m	1.3	Q235
	地板	2810*1180mm	15	玻镁防火地板
	侧扇主梁1	镀锌子母扣槽*5.9m	1.5	Q235
	侧扇立柱	镀锌方管30*50*1.18mm	1.3	Q235
	顶框主梁	异形P管60*80*5.9m	1.3	Q235
	封顶板	镀锌彩钢板	0.4	Q235
	顶部檩条	镀锌方管30*50*2.36m	1.3	Q235
	内吊顶板	20吊顶	0.25	镀锌彩涂板
	顶框次檩	异形P管70*80*2.36m	1.5	Q235
	前后墙护板	1160*105mm	2	Q235开平钢板
	吊头板	165*105mm	4	Q235开平钢板
门窗配置	门	宽970mm*高1970mm 钢制防盗门		
	窗	不锈钢护栏单坡推拉窗	塑钢(pvc)	
电器/电路配置	主线	4mm²国标软铜线		
	照明线	1.5mm²国标软铜线		
	插座线	2.5mm²国标软铜线		
	地线	1.5mm²国标软铜线		
	灯	条形灯	21W	
	插座	国际三孔10A*1个, 16A*1个	10A*2个/16A*1个	
开关	开关	10A		
空气开关	32A			
保温配置	配电箱			
	前后墙	65mm EPS复合板, 0.2mm 彩板双面, EPS容量 12kg		
	侧墙体	50mm EPS复合板, 0.2mm 彩板双面, EPS容量 12kg		
屋顶	75mm 玻璃丝绵卷, 14kg/m³			
辅料	D型胶条	8mm*6mm		

1400L export folding box product parameter list

Brand	ETEC				
Basic Information	Expanded Size (mm)		Folded Size (mm)		
	L5900*W2480*H2540		L5900*W2480*H340(±5)		
Framework	Internal Size (mm)		L5720*W2360*H2410		
	Name	Specifications	Thickness/mm	Properties/Materials	
	Bottom Frame Purlin	Galvanized square tube 40*40*5.9m	1.3	Q235	
	Bottom Purlin	Galvanized square tube 40*40*2.36mm	1.3	Q235	
	Bottom Stringer	Galvanized square pipe 60*140*5.9m	1.5	Q235	
	Side Main Beam 2	Special P tube 40*55*5.9m	1.3	Q235	
	Floor	2810*1180mm	15	MGO	
	Side Main Beam 1	Galvanized clasp groove *5.9m	1.5	Q235	
	Side Column	Galvanized square pipe 30*50*1.18mm	1.3	Q235	
	Top Frame Stringer	Special P tube 60*80*5.9m	1.3	Q235	
	Ceiling plate	Galvanized colored plate	0.4	Q235	
	Top Purlin	Galvanized square tube 30*50*2.36m	1.3	Q235	
	Inner ceiling panel	Colored steel panel ceiling	0.25	Q235	
	Top Frame Purlin	Special P tube 70*80*2.36m	1.5	Q235	
	Guard Panels of Front and Rear Wall	1160*105mm		Q235	
Lifting Clutches Plate	165*105mm	4	Q235		
Window and Door System	Frame of Front and Rear Walls		Galvanized square tube 40*80*2.34m*2pcs/2.33m*2pcs	1.3	Q235
	Door Frame	Galvanized U groove 40*70*2.33m*1pc/0.97*1pc	1.3	Q235	
Electrical System	Door	W970mm*H1970mm steel security door			
	Window	single glass PVC sliding window			
	Main circuit	4mm² GB soft copper wire			
	Lighting Circuit	1.5mm² GB soft copper wire			
	Socket Wire	2.5mm² GB soft copper wire			
	Ground Wire	1.5mm² GB soft copper wire			
Thermal Insulation Material	Lamp	LED lamp	21W		
	Socket	International Triple Hole 10 A*1, 16 A*1	10A*2/16A*1		
	Switch	Switch	10A		
Other Accessories	Air Switch		32A		
	Switch Box				
Thermal Insulation Material	Front and Rear Wall	65mm EPS color steel sandwich panel, 0.2mm double sided colored plate EPS unit weight: 8kg/m³			
	Side wall	50mm EPS color steel sandwich panel, 0.2mm double sided colored plat EPS unit weight: 8kg/m³			
Roof	75mm glass wool, 14kg/m³				
Type D Strip	8mm*6mm				

FOLD STEPS >>>

折叠步骤



LOADING PHOTOS >>>

装车照片



PRODUCT EXTERIOR

产品外观



SINGLE BED FOLDING BED
单铺折叠床



FOLDING STATE
折叠状态



FOLDING STATE
折叠状态



FOLDING BED WITH UPPER AND LOWER BUNKS
上下铺折叠床

PRODUCT PARAMETERS

产品参数

基本特征	外部尺寸 (mm)	1930*880*1650	
	折叠尺寸 (mm)	1930*880*120	
框架结构	床腿	40*40mm镀锌方管	40*40*1.2m Q235
	框架	40*40mm镀锌方管	40*40*1.2m Q235
	木质床板		1820*800*0.5mm
重量(kg)	38		
整体框架保护涂料	静电喷涂(白色)		
质量保证	一年质保(中国)		

Basic Information	Size(mm)	930*880*1650	
	Folded Size(mm)	1930*880*120	
Frame structure	Bed legs:	40*40mm galvanized square tube	40*40*1.2m Q235
	Frame:	40*40mm galvanized square tube	40*40*1.2m Q235
	Wooden bed board		1820*800*0.5mm
Weight (kg)	38		
Protective Coating for All Frames	Electrostatic spraying (white)		
Warranty	One year warranty (China)		

MOBILE SINGLE-PERSON TOILET >>>

移动单人卫生间



PRODUCT PRESENTATION

产品参数

品牌	HUAYING	
型号	单位卫生间	
基本特征	外部尺寸 (mm)	长1300*宽1100*高2400
	内部尺寸 (mm)	长1190*宽990*高2220
框架	立柱	80*80*5mm角钢 Q235B
	顶框	80*80*5mm角钢 Q235B
	底框	镀锌方管80*80*2.0mm Q235B
	檩条	镀锌方管40*60*1.5mm Q235B
叉车梁	18#槽钢 Q235B	
表面防腐	整体静电喷涂/灰色	
墙板	彩钢板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
顶板	彩钢墙板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
地板	地板	18mm水泥地板+2.0PVC木纹地板革
功能系统	后排陶瓷马桶*1、三角洗手柱盆*1、4寸排风扇*1、马桶刷*1、开关照明*1、抽纸盒*1	
门窗	窗	200mm*350mm 百叶换气窗*1
	门	不锈钢包边复合板门*1

Brand	Huaying	
Model	Toilet	
Basic Information	External Size (mm)	L1300*W1100*H2400
	Inside Size (mm)	L1190*W990*H2220
Framework	Column	80*80*5mm Angle steel Q235B
	Top Frame	80*80*5mm Angle steel Q235B
	Bottom Frame	Galvanized square tube: 80*80*2.0mm Q235B
	Purlin	Galvanized square tube: 40*60*1.5mm Q235B
Forklift Beam	18#channel steel Q235B	
Surface Anti-corrosion	Overall electrostatic spraying /gray	
Wall	Colored Steel Plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Roof	Colored Steel Plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Floor	Floor	18mm cement floor + 2.0mm PVC floor leather
Functional System	Rear ceramic toilet*1pc, triangle hand washing pedestal basin*1pc, 4 inch exhaust fan*1pc, toilet brush*1pc, lamp*1pc, paper drawer*1pc.	
Door and Window	Window	200*350mm lower air window*1pc
	Door	Stainless steel trim composite door*1pc

MOBILE DOUBLE TOILET >>>

移动双人卫生间



PRODUCT PRESENTATION

产品参数

品牌		
型号	双位卫生间	
基本特征	外部尺寸 (mm)	长2080*宽1300*高2400
	每位内部尺寸 (mm)	长1190*宽990*高2220
框架	立柱	80*80*5mm角钢 Q235B
	顶框	80*80*5mm角钢 Q235B
	底框	镀锌方管80*80*2.0mm Q235B
	檩条	镀锌方管40*60*1.5mm Q235B
	叉车梁	18#槽钢 Q235B
表面防腐	整体静电喷涂/灰色	
墙板	彩钢板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
顶板	彩钢墙板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
地板	地板	18mm水泥地板+2.0mmPVC木纹地板革
功能系统	后排陶瓷马桶*2、三角洗手柱盆*2、4寸排风扇*2、马桶刷*2、开关照明*2、抽纸盒*2	
门窗	窗	200*350mm百叶换气窗*2
	门	不锈钢包边复合板门*2

Brand	Huaying	
Model	Double Toilet	
Basic Information	External Size (mm)	L2080*W1300*H2400
	Internal Size/per toilet (mm)	L1190*W990*H2220
Frame	Column	80*80*5mm Angle steel Q235B
	Top Frame	80*80*5mm Angle steel Q235B
	Bottom Frame	Galvanized square tube: 80*80*2.0mm Q235B
	Purlin	Galvanized square tube: 40*60*1.5mm Q235B
	Forklift Beam	18#channel steel Q235B
Surface Anti-corrosion	Overall electrostatic spraying /gray	
Wall	Colored steel plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Roof	Colored steel plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Functional System	Rear ceramic toilet*2pcs, triangle hand washing pedestal basin*2pcs, 4 inch exhaust fan*2pcs, toilet brush*2pcs, lamp*2pcs, paper drawer*2pcs	
Doors and Window	Window	200*350mm louver air window*2pcs
	Door	Stainless steel trim composite door*2pcs

MOBILE SHOWER TOILET >>>

移动淋浴卫生间



PRODUCT PRESENTATION

产品参数

品牌		
型号	淋浴卫生间	
基本特征	外部尺寸 (mm)	长2080*宽1850*高2400
	内部尺寸 (mm)	长1970*宽1740*高2220
框架	立柱	80*80*5mm角钢 Q235B
	顶框	80*80*5mm角钢 Q235B
	底框	镀锌方管80*80*2.0mm Q235B
	檩条	镀锌方管40*60*1.5mm Q235B
	叉车梁	18#槽钢 Q235B
表面防腐	整体静电喷涂/灰色	
墙板	彩钢板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
顶板	彩钢墙板	950*50mm, 0.30mm双面彩钢板, EPS夹心板容重12KG/m³.
地板	地板	18mm水泥地板+2.0mmPVC木纹地板革
功能系统	普通花洒*1、陶瓷柜盆*1、墙壁镜子*1、置物架*1、挂钩*2、陶瓷马桶*1、排风扇*1、马桶刷*1、开关照明*1、抽纸盒*1	
门窗	窗	400mm*600mm断桥铝通风窗*1
	门	不锈钢包边复合板门*1

Brand	Huaying	
Model	Shower Toilet	
Basic Information	External Size (mm)	L2080*W1850*H2400
	Inside Size (mm)	L1970*W1740*H2220
Framework	Column	80*80*5mm Angle steel Q235B
	Top Frame	80*80*5mm Angle steel Q235B
	Bottom Frame	Galvanized square tube: 80*80*2.0mm Q235B
	Purlin	Galvanized square tube: 40*60*1.5mm Q235B
	Forklift Beam	18 #channel steel Q235B
Surface Anti-corrosion	Overall electrostatic spraying /gray	
Wall	Colored steel plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Roof	Colored steel plate	950*50mm, 0.30mm double-sided colored plate, EPS unit weight: 12 kg/m³.
Functional System	General shower head*1pc, ceramic cabinet basin*1pc, wall mirror*1pc, shelf*1pc, hook*2pc, ceramic toilet*1pc, exhaust fan*1pc, toilet brush*1pc, lamp*1pc, paper drawer*1pc.	
Door and Window	Window	400*600mm broken bridge aluminum window *1pc
	Door	Stainless steel trim composite door*1pc